

PH 4/3 Pendant

PH 4/3 Pendant - 5741087549

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure uniform, comfortable light distribution.



Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish actress Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



Product info

Finish

White, powder coated.

Materials

Shades: Spun aluminium. Anti-glare disc: White, spun aluminium.

Mounting

Suspension type: Cable 3x0,75mm². Canopy: Yes. Cable length: 3m.

Sizes and weights

Width x Height x Length (mm) | 400 x 200 x 400 Max 1.1 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.

Specification notes


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Light source & energy class

A+ - E | 60W E27




Product family




PH 4/3 Table

Light distribution diagrams


Cartesian

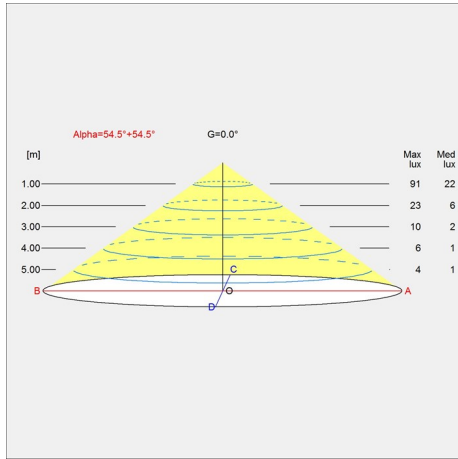

Isolux

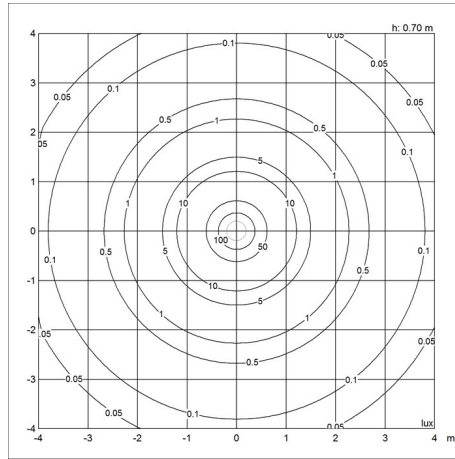

Polar

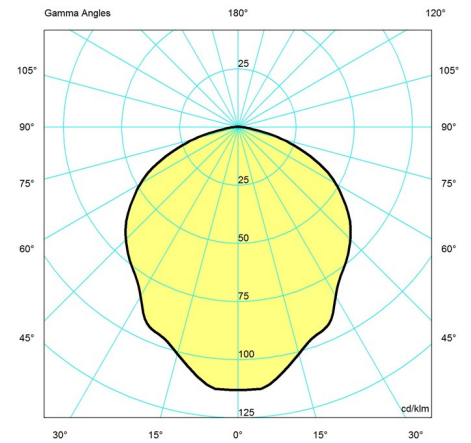

Spare parts & accessories

Product	Variant number
PH 4-3, COVER PLATE, WHITE NEW	5741087552
BEARING PLATE 18/56 F/STANDARD SUSP.	5741481190
PH 4-3, COVER PLATE, ORANGE, F/OLD VER.	5741480997
CANOPY WHITE 2-PART, TOPHAT ®	5749329034

Data specifications

BUG Rating	B0 U1 G0	Built-in Height	-
Class	I	CRI	-
Efficacy	-	Height	200
IK class	-	Inrush Current	-
IP class	20	Kelvin	-
L80B10 (hours)	-	L80B50 (hours)	-
Length	400	Light source	60W E27

PH 4/3 Pendant

Lumen	-
Net Weight	1.129
SDCM	-
Surge Protection. I _{max} IEC/EN61643-11, V IEC/EN61547	-
Watt	-
Wind Load per m2	-

Min. Dim Level (%)	-
Power Factor (P = 100 % / P = 50 %)	-
Standby (W)	-
UGR Transversal / Axial	14.8/14.8
Width	400