

# PH 4/3 Table

PH 4/3 Table - 5744615002

The fixture is designed based on the principle of a reflective three-shade system, which directs the light downwards. The shades are made of metal and painted white to ensure diffuse, comfortable light distribution.



## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish actress Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



A private  
Residence TG



Ballywalter

## Product info

### Finish

White, powder coated. High lustre chrome plated.

### Materials

Shades: Spun aluminium. Base: High lustre chrome plated, spun brass. Stem: High lustre chrome plated, steel. Triangular piece: Black sandblasted, injection moulded bakelite.

### Mounting

Cable type: Plastic cord with plug. Cable length: 2.9m. Light control: In-line switch on cord.

### Sizes and weights

Width x Height x Length (mm) | 450 x 540 x 450 Max 3.0 kg

### Class

Ingress protection IP20. Electric shock protection II w/o ground.

### Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

### Light source & energy class

A+ - E | 1x100W E27




## Product family




PH 4/3 Pendant

# Light distribution diagrams


Cartesian

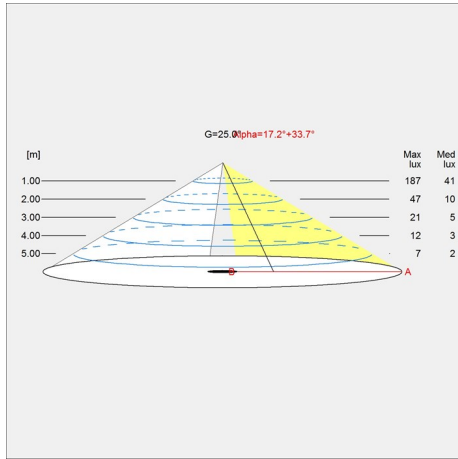

Isolux

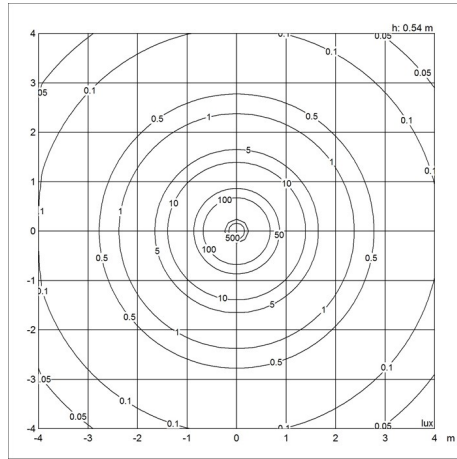

Polar

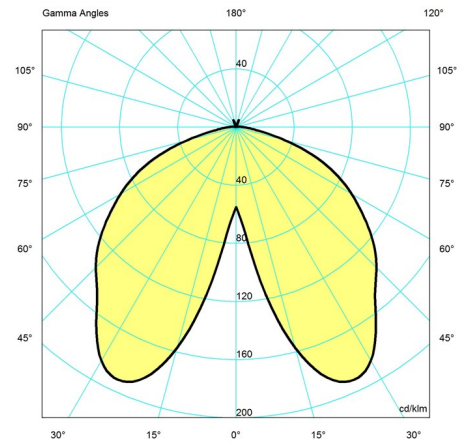

## Spare parts & accessories

Product	Variant number
PH 4-3 TABLE, FINGER SCREW W/WASHER	5744610230
PH 4-3 TABLE MIDDLE/LOWER SHADESET NEW	5744610829
PH 4-3 TABLE, TOP SHADE NEW	5744610926
PH 4-3 TABLE, NIPPEL	5744610515
PH 4-3 TABLE, LAMPHOLDER ASS.	5744610696
PH 4-3 TABLE, LAMPHOLDER BRACKET	5744610706

## Data specifications

BUG Rating	<b>B0 U1 G0</b>	Built-in Height	-
Class	<b>II</b>	CRI	-
Efficacy	-	Height	<b>540</b>
IK class	-	Inrush Current	-
IP class	<b>20</b>	Kelvin	-
L80B10 (hours)	-	L80B50 (hours)	-

**PH 4/3 Table**

Length	<b>450</b>
Lumen	-
Net Weight	<b>2.953</b>
SDCM	-
Surge Protection. I <sub>max</sub> IEC/EN61643-11, V IEC/EN61547	-
Watt	-
Wind Load per m <sup>2</sup>	-

Light source	<b>1x100W E27</b>
Min. Dim Level (%)	-
Power Factor (P = 100 % / P = 50 %)	-
Standby (W)	-
UGR Transversal / Axial	<b>15.2/15.2</b>
Width	<b>450</b>