

Daphne Parete 35

design Tommaso Cimini, 1975



release 2019, December



Wall lamp made of steel with an adjustable, pivoting arm.
The head can rotate 360°.
Light Source: 5WLED, with an ON/OFF switch.

Finishing

Standard

● Black soft touch
cod. 05L01STK27

○ Matt white
cod. 05L02OPK27

● Brushed nickel
cod. 05L44K27

Special

● Matt red
cod. 05L03OPK27

● Matt yellow
cod. 05L05OPK27

● Metallic bronze
cod. 05L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 5W
- Power absorption: 5,5W
- Stand-by absorption: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: wall
- Net weight: 0,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
0,7 Kg

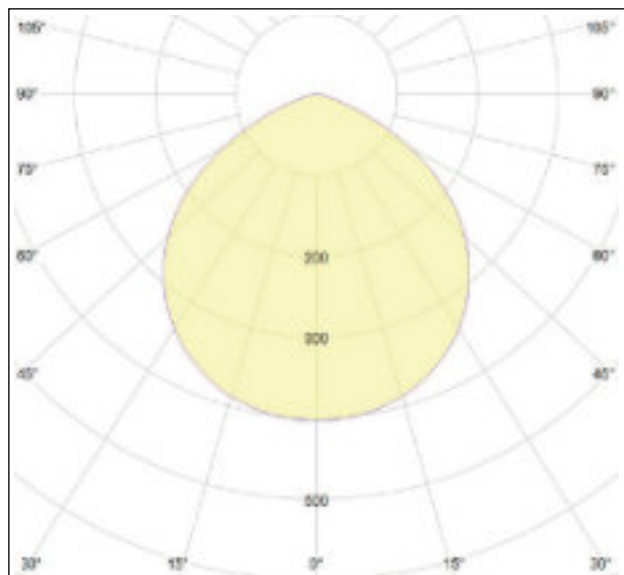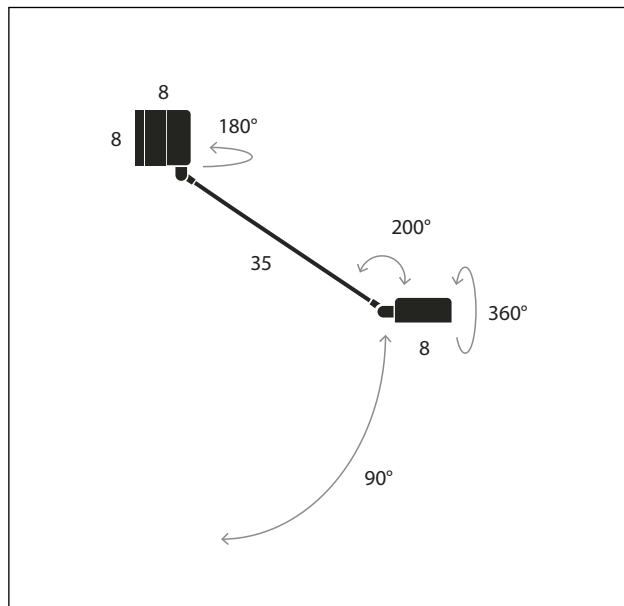


Daphne Parete 35

design Tommaso Cimini, 1975

 LUMINA

release 2019, December



Wall lamp made of steel with an adjustable, pivoting arm.
The head can rotate 360°.
Light Source: 5WLED, with an ON/OFF switch.

Finishing

Standard

 Black soft touch
cod. 05L01STK27ETL

 Matt white
cod. 05L02OPK27ETL

 Brushed nickel
cod. 05L44K27ETL

Special

 Matt red
cod. 05L03OPK27ETL

 Matt yellow
cod. 05L05OPK27ETL

 Metallic bronze
cod. 05L29MTK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 5W
- Power absorption: 5,5W
- Stand-by absorption: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: wall
- Net weight: 0,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
0,7 Kg

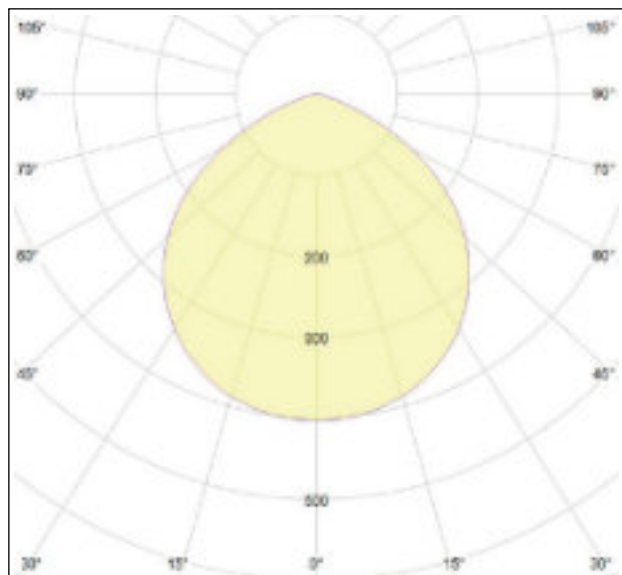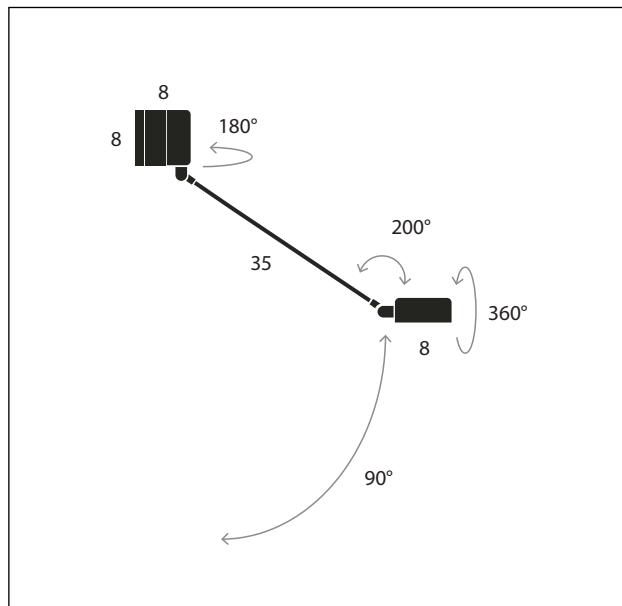


Daphne Parete 20

design Tommaso Cimini, 1975

 LUMINA

release 2019, December



Wall lamp made of steel with an adjustable, pivoting arm.
The head can rotate 360°.
Light Source: 5WLED, with an ON/OFF switch.

Finishing

Standard

 Black soft touch
cod. 06L01STK27

 Matt white
cod. 06L02OPK27

 Brushed nickel
cod. 06L44K27

Special

 Matt red
cod. 06L03OPK27

 Matt yellow
cod. 06L05OPK27

 Metallic bronze
cod. 06L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 5W
- Power absorption: 5,5W
- Stand-by absorption: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: wall
- Net weight: 0,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
0,7 Kg

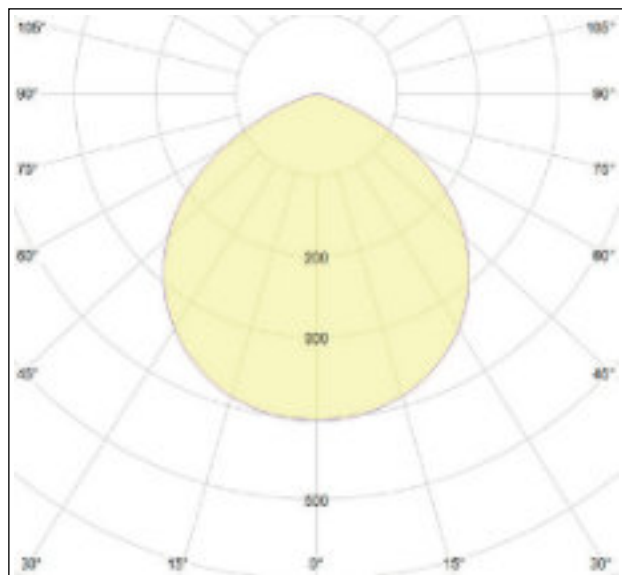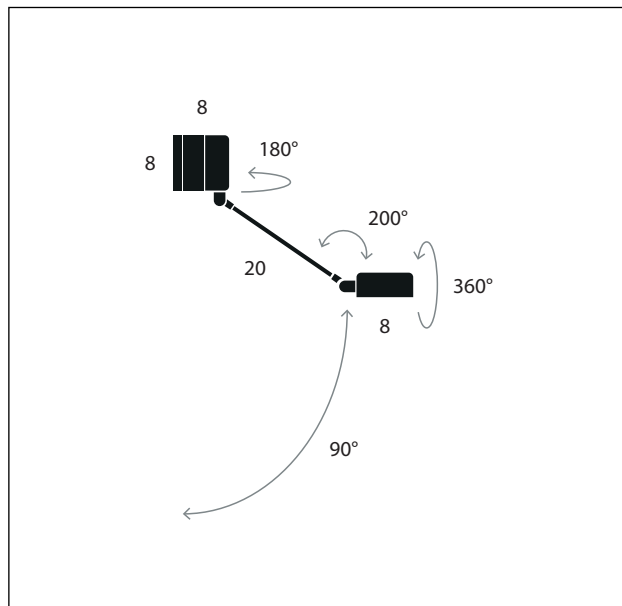

Daphine Parete 20

design Tommaso Cimini, 1975

 LUMINA

release 2019, December



Wall lamp made of steel with an adjustable, pivoting arm.
The head can rotate 360°.
Light Source: 5WLED, with an ON/OFF switch.

Finishing

Standard

 Black soft touch
cod. 06L01STK27ETL

 Matt white
cod. 06L02OPK27ETL

 Brushed nickel
cod. 06L44K27ETL

Special

 Matt red
cod. 06L03OPK27ETL

 Matt yellow
cod. 06L05OPK27ETL

 Metallic bronze
cod. 06L29MTK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 5W
- Power absorbtion: 5,5W
- Stand-by absorbtion: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: wall
- Net weight: 0,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
0,7 Kg

