



7216 Pillar Light Offset LED Wall Light

Side View
5" (125 mm)

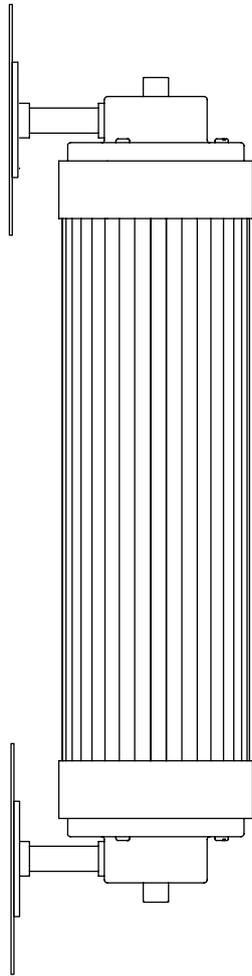

Front View
4.75" (120 mm)

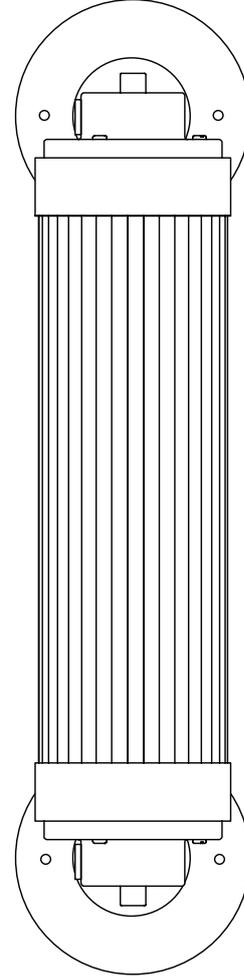

20" (505 mm)

Specifications

PRODUCT CODE:	US-DP7216	IP RATING:	IP44
MAX WATTAGE:	10W	MATERIAL(S):	BRASS, GLASS
VOLTAGE:	12 (DC)	AVAILABLE FINISH:	WEATHERED/POLISHED BRASS OR CHROME PLATE
BULB TYPE:	LED TUBE (SUPPLIED)		

Suitable for use in Damp locations

Supplied with integral LED and driver (for remote installation up to 10 meters from the fitting*)

Fitting is supplied with phase (trailing and leading edge) dimmable driver**

Warm white tone LED (2700K)

The fitting can be mounted to a standard 4" junction box

*Assuming minimum cable gauge is 1.5mm (16AWG)

**Product has smooth, stable dimming performance from 10-100% with Lutron CL dimming module.

Dimming performance may vary between manufacturers, check minimum load and compatibility against dimmer specification.

IMPORTANT:

- LOW VOLTAGE LED FITTING
- CONNECTION TO REMOTE DRIVER (SUPPLIED)
REQUIRED FOR MAINS INSTALLATION