



Package Contents



Alter Mirror




Screws & spacers

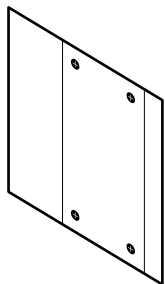


Drilling Template


Installation

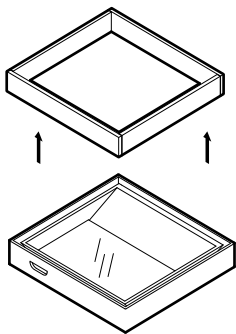


- 1 Remove the honeycomb frame from around the mirror

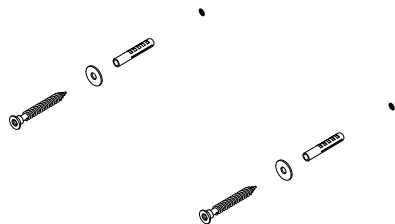


- 4 Use wall plugs suitable for your wall material

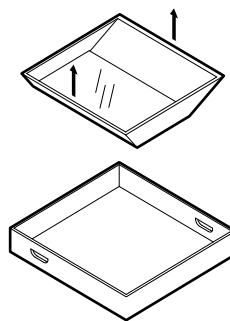


- 2 Grab the sides and carefully lift the mirror out of the box

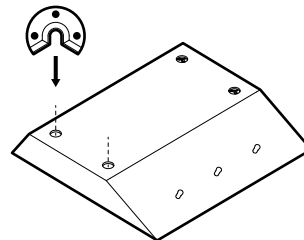

- 5 The orientation of the mirror can be altered 180 degrees by re-attaching the brackets

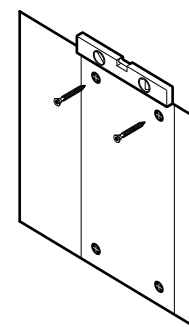

- 3 Position the Template level and mark holes through the top crosses

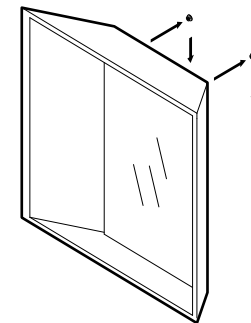

- 6 Hang the mirror on the wall as pictured. Maximum load for pegs is 2kg