BLOCK SCONCE

MATERIALS

I. METAL

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

I. METAL

The metal used for our range oxidise with age and environment, both of which contribute to the evolution of a natural patina. If you favour the original bright finish of your pieces, this is easily restored by use of polishing solution - we recommend Braso or Silvo depending on the metal in question - applied with a soft, clean cloth.

Because each object is cast in small batches, slight variations will occur from one individual piece to another. Production marks may include slight pour ripples or surface pitting, which imprint every item with a unique character.

II. STONE


Each of our stone objects is unique, due to the variations of colour and veining that effect the inherent aesthetic appeal of natural stone.

To clean stone items, begin by removing any dust with a soft, dry cloth. A cloth dampened with warm water will usually remove superficial marks; if more effort is necessary, add a modest amount of pH-neutral detergent. Finish by wiping each piece thoroughly with a clean, dry cloth to absorb any residual moisture.



OVERALL DIMENSIONS

н 120мм × D 196мм × W 190мм н 13.78іn × D 14.75іn × W 4.13іn



II. STONE



Calacatta

Aluminium

Blackened

Bronze



Calacatta Viola



Travertine



Black Travertine



Honey Onyx



White Alabaster

WEIGHT


Aluminium (6,000g / 211.6oz)

Bronze/Blackened (9,000g / 282.2oz)

Stone (17,000g / 599.7oz)

PACKAGING

Recycled Cardboard н 145мм × L 440мм × w 400мм

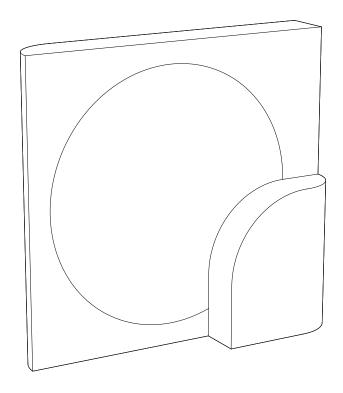

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE 9W LED max (supplied)

FITTING DESCRIPTION Bayonet Ø22MM (B22)

SUGGESTED LUMEN RATING 250LM

WATTAGE 3.3w Equiv 25w Incandescent

KELVIN RATING 2700κ Warm White

VOLTAGE 230-240v / 50-60hz

DIMMABILITY

No

IF THE SUPPLIED FLEXIBLE CORD IS DAMAGED, REPLACE WITH 2 CORE SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE 9W LED max (not supplied)

FITTING DESCRIPTION Edison Ø26MM (E22)

SUGGESTED LUMEN RATING

250 см

WATTAGE 3.3w Equiv 25w Incandescent

KELVIN RATING 2700κ-3000κ Warm White

VOLTAGE 110-120v / 60HZ AC

DIMMABILITY **Bulb dependant**

IF THE SUPPLIED CORD IS DAMAGED, REPLACE WITH 2 CORE SHEATHED TYPE ONLY. HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS 9405.40.8440

HS CODE CORD SETS / POWER SUPPLY ELBZ.E465216

LISTED PARTS *
UL Lamp Holder E3810

UL Cord ELBZ . E465216 Canda

ELBZ . E465216