

OORT – SUSPENSION

Jacopo Roda

The OORT system is composed of tubular elements made of borosilicate glass. Inside them are flexible LED light tubes of the latest generation, easily replaceable, with perfectly uniform 360° light emission and certified also for outdoor use. The borosilicate glass is ribbed on the inside, a feature that enhances the light by making it warm and welcoming, brings out the effect of light and shadow, and allows easy cleaning of the smooth outer surface. The light is diffuse, dimmable and available at 3000K (1900Lm/m) or Dim To Warm which allows to change the colour temperature, by dimming, from minimum 1800K to 4000K at maximum intensity. The flux is dimmer-dependent to a maximum of approx 1000Lm/m. The product can be supplied at 2700K on request.



BLACK / LARGE

SPECIFICHE TECNICHE


Material	Galvanized metal,Glass
Switching	Dimmerable
Emission	Diffused light
Total power	28W
Light source	Integrated LED
Flusso luminoso	2660 Lm
Temperatura colore	2700 K
TYP CRI	>90
IP	20

SKU

OORT00007

NOTES

Vertical model. Centre ceiling rose for electrical connection in white finish.
Dimmable ballast. Integrated LED.

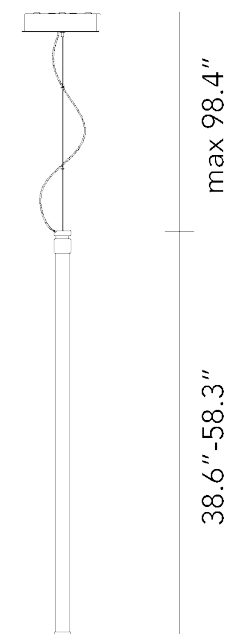

BLACK / MEDIUM

SPECIFICHE TECNICHE


Material	Galvanized metal,Glass
Switching	Dimmerable
Emission	Diffused light
Total power	18W
Light source	Integrated LED
Flusso luminoso	1700 Lm
Temperatura colore	2700 K
TYP CRI	>90
IP	20

SKU

OORT00006

NOTES

Vertical model. Centre ceiling rose for electrical connection in white finish.
Dimmable ballast. Integrated LED.

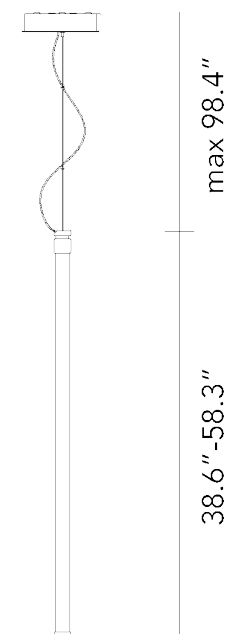

BLACK / SMALL

SPECIFICHE TECNICHE

Material	Galvanized metal,Glass
Switching	Dimmerable
Emission	Diffused light
Total power	8W
Light source	Integrated LED
Flusso luminoso	760 Lm
Temperatura colore	2700 K
TYP CRI	>90
IP	20

SKU

OORT00005

NOTES

Vertical model. Centre ceiling rose for electrical connection in white finish.
Dimmable ballast. Integrated LED.

