


UNTITLED READING LINEAR

Bernhard Osann

A definitive synthesis of mechanics and lighting technology, this design is clean and essential, with miniaturized joints that allow for extreme flexibility of movement. The Linear version has been designed explicitly with optics to ensure maximum visual comfort in work environments.



2700K

LAMPING

Source	linear LED
Total power	7W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature led	2700K
Luminous flux led	485lm
Typ CRI	90
Ip class	20
Dimensions	32.3'x 43.3'
Notes	cable length 6.6', 155° joint rotation, black RAL 9005, 3500K and 4000K available on request


Codes

UNT LN2 2A
UNT LW2 2A
UNT LD2 2A
UNT LG2 2A

Structure

black
white
titan grey
gold

Certificazioni

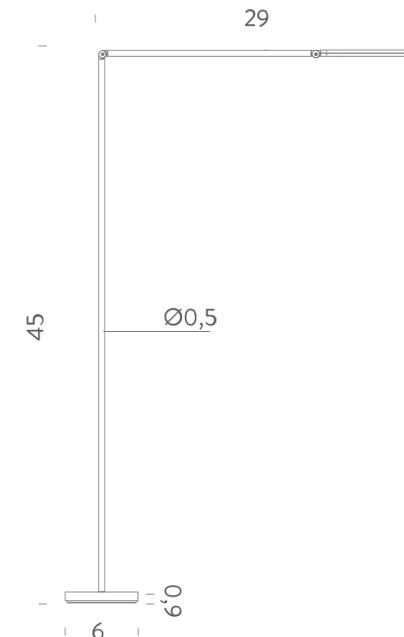

3000K

LAMPING

Source	linear LED
Total power	7W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature led	3000K
Luminous flux led	485lm
Typ CRI	90
Ip class	20
Dimensions	32.3'x 43.3'
Notes	cable length 6.6', 155° joint rotation, black RAL 9005, 3500K and 4000K available on request

Codes

UNT LNN 2A
UNT LWW 2A
UNT LDD 2A
UNT LGG 2A

Structure

black
white
titan grey
gold

Certificazioni

