


UNTITLED READING SPOT

Bernhard Osann

A definitive synthesis of mechanics and lighting technology, this design is clean and essential, with miniaturized joints that allow for extreme flexibility of movement. The Linear version has been designed explicitly with optics to ensure maximum visual comfort in work environments.



2700K

LAMPING

Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature led	2700K
Luminous flux led	395lm
Typ CRI	90
Ip class	20
Dimensions	27.5'x 43.3'
Notes	cable length 6.6', 155° joint rotation, black RAL 9005


Codes

UNT LN2 2B
UNT LW2 2B
UNT LD2 2B
UNT LG2 2B

Structure

black
white
titan grey
gold

Certificazioni

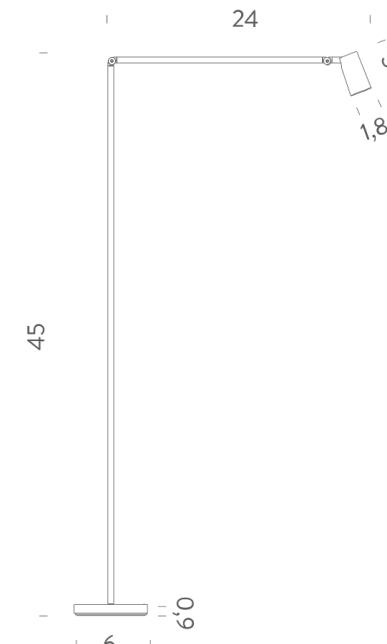

3000K

LAMPING


Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature led	3000K
Luminous flux led	395lm (luminous output)
Typ CRI	90
Ip class	20
Dimensions	27.5'x 43.3'
Notes	cable length 6.6', 155° joint rotation, black RAL 9005

Codes

UNT LNN 2B
UNT LWW 2B
UNT LDD 2B
UNT LGG 2B

Structure

black
white
titan grey
gold

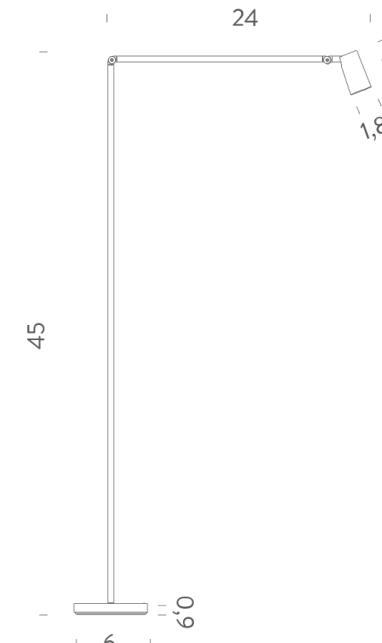

Certificazioni

